

INTRODUCTION

The following instructions apply to one hopper only; repeat each step for all hoppers.

Kit Contents

Inventory this kit for completeness before proceeding.

Part Number	Qty.	Description
27446.0000	2	Lamps, T-5 Wedgebase Min.
26781.0000	2	Auger Shaft Bushing (Blue)
37593.0000	2	Cooling Drum Seal
32079.0000	2	Hopper/Drum Seal
32268.0000	2	Seal, Faucet (Clear)
29563.0000	-	Lubricant ("Krytox")
28395.0000	1	Seal Insertion Tool

INSTRUCTIONS

WARNING - Disconnect the dispenser from the power source before the removal of any panel or the replacement of any component.

1. Drain, remove and clean hopper; refer to the Operating and Service Manual for proper cleaning procedures. Discard the hopper/drum seal and faucet seal.
2. Remove the #8 locking screws securing auger motor cover to the cooling drum mount assembly; remove cover and set aside for reassembly.
3. Remove the #8 locking screw on the lower right side (viewed from front) of the auger motor mounting bracket securing the auger motor run capacitor. Set capacitor aside with wires attached.
4. Disconnect the auger motor terminal from the terminal on the main wiring harness.
5. Remove the remaining #8 locking screws securing the cooling drum mounting bracket. Remove motor with mounting bracket.

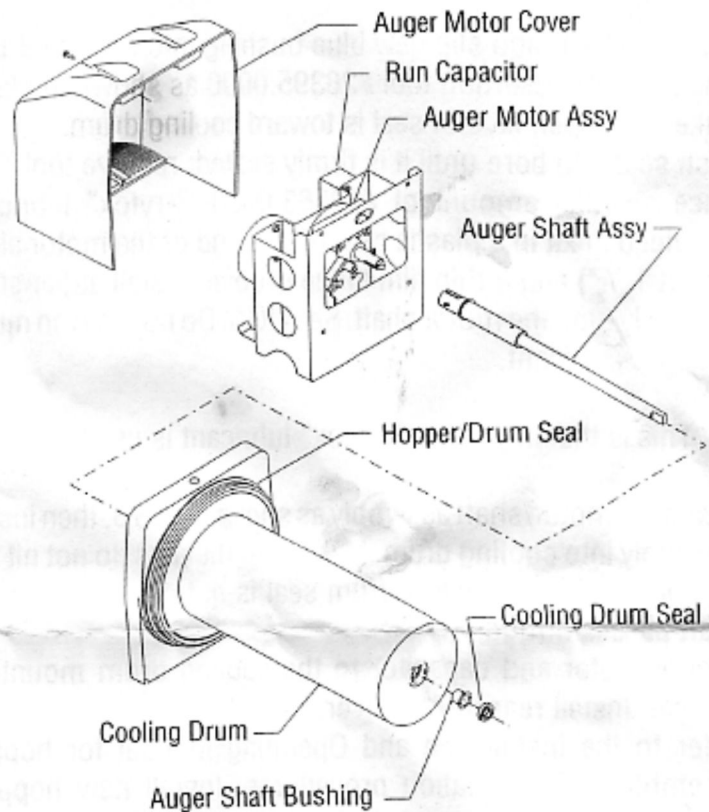


FIG 1

P2528

(Continued)

BUNN-O-MATIC CORPORATION

POST OFFICE BOX 3227

SPRINGFIELD, ILLINOIS 62708-3227

PHONE: (217) 529-6601 FAX: (217) 529-6644

